



# Cylinder support arch

## Position and force control

● Mechanical engineering

● Realizations

○ Cabling

○ Machines

The cylinder support arch allows the mounting of an idle cylinder (not shown in the illustrations) on a paper web production line.


Thanks to the **2 independent brushless linear axes** located on each side, the cylinder is positioned in an extremely precise way.

With the addition of **2 load cells**, the force applied on each side is also controlled with an **accuracy of +/- 10N**.

In order to obtain a perfect parallelism between the cylinder and the rest of the customer's installation, the feet of the arch are equipped with a micrometric adjustment.

### SPECIFICATIONS :

- **Dimensions: 1150 x 250 x 650mm**
- **Push force: 2x 35kN**
- **Accuracy of effort measurement: +/-10N**
- **Linear axis stroke: 105mm**

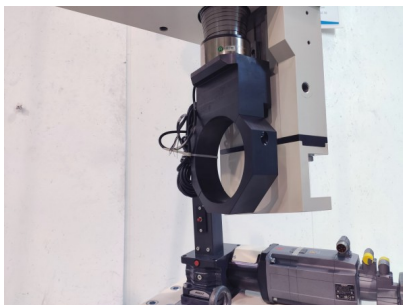

Reference : 3430-50

Project added the 27/05/20



**CEREST**

20 Rue des Frères Lumière  
68000 Colmar - FRANCE



**EMAIL**

[cerest@cerest.com](mailto:cerest@cerest.com)



**PHONE**

+33 (0)3.89.21.02.56



**INTERNET**

[www.cerest.com](http://www.cerest.com)